

HYDRAULIC CABLE CUTTERS



- ✓ CC0260 model is double acting and is especially recommended for sub-sea applications. Optionally we can supply special seal kits for deep water operation.
- ✓ CC0018, CC0040 and CC0075 models are self-contained, with integral built-in pump. These tools are supplied with a relief valve to prevent overload.
- ✓ Single acting models have spring return.
- ✓ Rotating heads for easy operation.
- ✓ Installing replacement blades is a simple operation.
- ✓ All models are provided with with standard female coupler AZ3140.
- ✓ CC0190 and CC01120 are equipped with handle.
- ✓ Carry box included for easy transport and tool protection.

Z12107
Air Hydraulic Pump



P.70

AP
Hydraulic Hoses



P.84



HYDRAULIC CABLE CUTTERS




Type **CC**

Capacity **7 - 43 ton**


Cable **max. 120 mm**

Max. pressure **700 bar**

CC0118 - CC0140 - CC0160 - CC0175 - CC0190 - CC01120

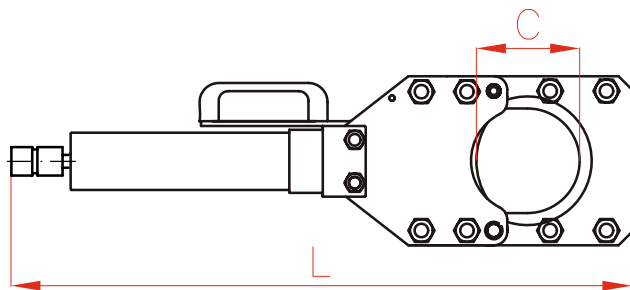

CC0018 - CC0040 - CC0075

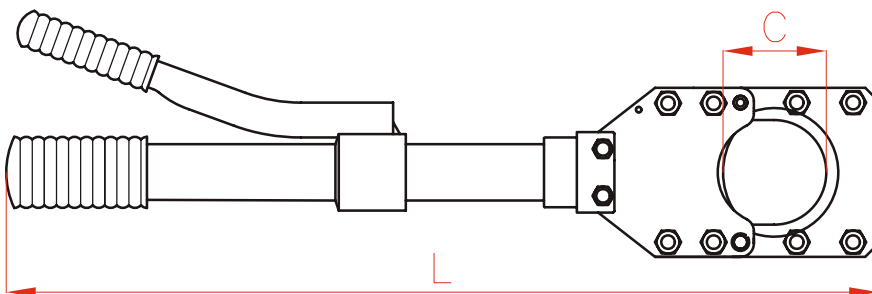

Model	Replacement Blades
LARZEP	LARZEP
CC0018	CRC18
CC0040	CRC35-40
CC0075	CRC75
CC0118	CRC18
CC0140	CRC35-40
CC0160	CRC0160
CC0175	CRC75
CC0190	CRC0190
CC01120	CRC01120
CC0260	CRC0160

Model	Capacity	Oil Capacity	L	C	Weight	Wire Rope Ø (Al)	Cable Ø Shown diameters are only for guidance				Wire Rope Ø (Steel) ¹⁾	
							Cable	Telephone	Lead Shielded	Underground	Cable	Wire
	kN	cm ³	mm	mm	kg	mm	mm	mm	mm	mm	mm	
CC0018	70	-	385	18	2,8	18	18	18	18	18	1	
CC0040	135	-	490	40	5,6	40	40	40	40	32	1	
CC0075	70	-	650	75	6,6	40	75	75	75	*	*	
CC0118	70	24	212	18	2,0	18	18	18	18	18	1	
CC0140	135	86	292	40	5,3	40	40	40	40	32	1	
CC0160	437	420	388	60	15,8	60	60	60	60	60	2	
CC0175	70	74	451	75	5,5	40	75	75	75	*	*	
CC0190	109	149	535	90	10,0	35	90	90	90	*	*	
CC01120	109	203	635	120	11,7	35	120	120	120	*	*	
CC0260	390	431	480	60	24,6	60	60	60	60	60	2	

* This unit is not designed to cut this material. Any attempt to do so may result in personal injury or damage to the unit and will void the warranty.

¹⁾ Max. Strength 1.800 N/mm²